


TEKNISKE DATA

Nominell effekt	5 kW
Virkningsgrad	84 %
Røykrørdiameter	180 mm
Min. skorkestrekk ved nominell effekt	12 Pa
Røykgasstemperatur	206 °C
Røykgassmassestrøm	4,3 g/s
CO (13% O ₂):	1128 mg/Nm ³
OGC (13% O ₂):	64 mg/Nm ³
PM (13% O ₂):	17 mg/Nm ³
NOx (13% O ₂):	128 mg/Nm ³
Brenselforbruk per time	1,53 kg/h
Brensel	ved (bøkekubber)
Vekt	115 kg



RESERVEDELER


Glass



624 x 250 x 400 mm

Brennkammer i Carcon

1. Bunn foran
2. Bunn bak
3. Bakvegg
4. Deflektor

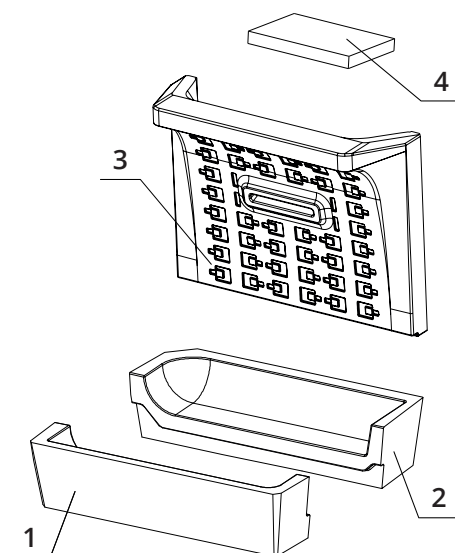

BEF FEEL 6 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
16510-1

ČSN EN
16510-2

eco
design

www.krby-bef.cz